

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
6 October 2005 (06.10.2005)

PCT

(10) International Publication Number
WO 2005/093183 A1

(51) International Patent Classification⁷:

E04B 2/70

(74) Agent: CURO AS; Box 38, N-7231 Lundamo (NO).

(21) International Application Number:

PCT/NO2005/000099

(22) International Filing Date: 18 March 2005 (18.03.2005)

(25) Filing Language:

Norwegian

(26) Publication Language:

English

(30) Priority Data:

2004 1280

26 March 2004 (26.03.2004)

NO

(71) Applicant (for all designated States except US): ISO-LAFT AS [NO/NO]; c/o Spilka Industri AS, Emblem, N-6013 Aalesund (NO).

(72) Inventor; and


(75) Inventor/Applicant (for US only): NORDLI, Bjarne [NO/NO]; Hatlevika 36, N-6016 Aalesund (NO).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(81) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,

[Continued on next page]

(54) Title: COGGING PIECE

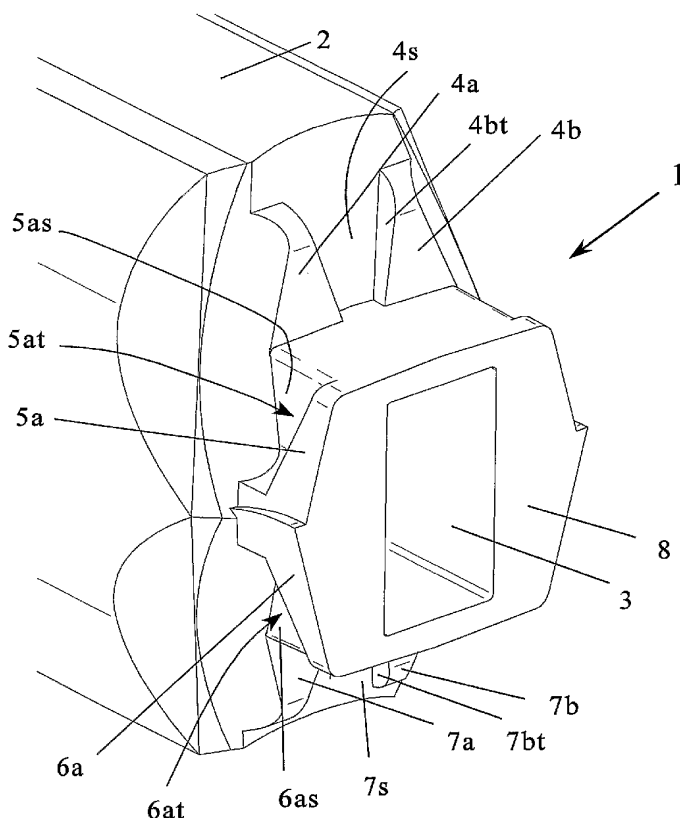

(57) Abstract: Cogging piece (1) for use when notching log constructional elements (2) to other log constructional elements (2) or to corresponding separate log constructional elements (9). The cogging piece is adapted to be attached to both ends of each log constructional element (2) and to the end of each end constructional element (9) that is adapted to face a cogged joint. The cogging piece (1) is provided with lateral (4at, 4bt, 4at, 4bt) and axial (5at, 5bt, 6at, 6bt) inclined surfaces that are adapted to rest against corresponding axial and lateral surfaces respectively of cogging pieces attached to below and/ or above intersecting log constructional elements and end constructional elements. Thus an increasing vertical force on a wall leads to an increased axial contraction of the cogged joints in the same wall.

WO 2005/093183 A1



SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*